


HHSL7845MB

Product Family	Hob
Built-in type	Support
Dimensions	83 cm
Power supply	Electric
Type	Induction with integrated hood
Extraction	Extraction
Electronic control	Yes
EAN code	8017709357146
Energy efficiency class (EEC)	A

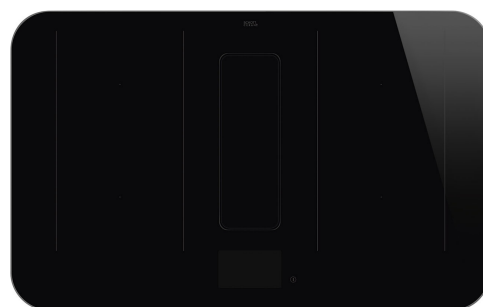

Aesthetics

Aesthetic	Isola
Serie	Alta Pro
Colour	Black with matt black frame
Perimeter lighting	Yes
Finishing	Glass
Material	Glass
Glass type	Prestige ceramic
Glass edge	Straight edge
Frame	Yes
Frame colour	Black
Frame material	Aluminum
Type of control setting	Vivo Screen
LED colours	TFT
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Grey
Alternative colours available	Stainless steel

Program / Functions

	
No. of induction cook zones	4
Time-setting options	Automatic switch-off
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	17

Total no. of cook zones

4

Options



Multizone Option	Yes	End cooking timer	4
Flexible Zone Type	MultiZone	Pause option	Yes
Worktop Cut-Out	490x750 mm	Minute minder	1
Double Booster	Yes	End of cooking alarm	Yes
Follow Pot	Yes	Residual time indicator	Yes
Pasta function	Yes	Limited Power	Si Advance
Steaming function	Yes	Consumption Mode	
Roasting function	Yes	Limited Power	2400 a 7400 - step 100 W
Auto-boiling Function	Yes	Consumption Mode in W	
Simmering Function	Yes	Showroom Demo Option	Yes
Keep warm automatic function	Yes	Control Lock / Child Safety	Yes
Melting/Low temperature cooking function	Yes	Cleaning option	Yes
		Quick start	Yes
		Rapid level selection	Yes

Technical Features



Front-left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.70 kW - 21x18 cm
 Rear-left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.70 kW - 21x18 cm
 Front-right - Induction - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.70 kW - 21x18 cm
 Rear-right - Induction - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.70 kW - 21x18 cm
 Multizone left - Booster 3.70 kW - 36x21 cm
 Multizone right - Booster 3.70 kW - 36x21 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overheat	Yes
pan detection	Yes, min. 9 cm	Residual heat indicator	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	Protection against accidental start up	Yes

Accessories included

Regenerable charcoal filter	Yes	Sliding door	Yes
------------------------------------	-----	---------------------	-----

Electrical Connection

Electrical connection rating (W)	7600 W	Type of electric cable supplied	Yes, Single and Double phase
---	--------	--	------------------------------

Current	33 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	158 cm
Voltage 2 (V)	380-415 V	Plug	Not present

Controls (hood)

Hood control setting	Touch Capacitive	Display	Yes
Led color	Colori multipli		

Programs / Functions (hood)

Delay function	Yes	Hood time setting	Delay
No. of speeds	8	Automatic connection between integrated hood and hob	Yes
Intensive speed	2		

Technical Features (Hood)

Free outlet maximum capacity	650 m³/h	Anti-grease filters	Alluminio
Motor power	220 W	Charcoal filters included	YES, regenerable
No. of filters	1	Filter replacement indicator	Yes

Performance / Energy Label (hood)

Fluid Dynamic Efficiency (FDE)	29.8	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Lighting Efficiency (LE)	0.0 lux/W	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Lighting Efficiency Class (LEC)	NA	Time increase factor (F)	0.9
Grease Filtering Efficiency (GFE)	86 %	Energy Efficiency Index	49.8
Grease Filtering Efficiency Class (GFEC)	B	Measured air flow rate at best efficiency point (Qbep)	368 m³/h
Air flow at mininum speed (Qmin)	220 m³/h	Measured air pressure at best efficiency point (Pbep)	406 Pa
Air flow at maximum speed (Qmax)	490 m³/h	Measured electric power input at best efficiency point (Wbep)	139 W
Air flow at boost speed (Qboost)	620 m³/h	Sound power level at highest setting (Lwa)	64 dBA

Speed 1

Extraction rate IEC 61591	220 m³/h
Noise level IEC 60704-2-13	45 dBA
Pressure	170 Pa
Power	23 W

Speed 2

Extraction rate IEC 61591	260 m³/h
Noise level IEC 60704-2-13	49 dBA
Pressure	238 Pa
Power	28 W

Speed 3

Extraction rate IEC 61591	290 m³/h
Noise level IEC 60704-2-13	52 dBA
Pressure	295 Pa
Power	32 W

Speed 4

Extraction rate IEC 61591	310 m³/h
Noise level IEC 60704-2-13	55 dBA
Pressure	380 Pa
Power	41 W

Speed 5

Extraction rate IEC 61591	330 m³/h
Noise level IEC 60704-2-13	58 dBA
Pressure	440 Pa
Power	55 W

Speed 6

Extraction rate IEC 61591	410 m³/h
Noise level IEC 60704-2-13	60 dBA
Pressure	500 Pa
Power	70 W

Speed 7

Extraction rate IEC 61591	430 m³/h
Noise level IEC 60704-2-13	62 dBA
Pressure	520 Pa
Power	86 W

Speed 8


Extraction rate IEC 61591	490 m³/h
Noise level IEC 60704-2-13	64 dBA
Pressure	540 Pa
Power	108 W

Intensive speed

Extraction rate (IEC 61591)	600 m³/h
Noise level IEC 60704-2-13	67 dBA
Pressure	550 Pa
Power	198 W

Intensive Speed 2

Extraction rate IEC 61591	620 m³/h
Noise level IEC 60704-2-13	68 dBA
Pressure	560 Pa
Power	216 W

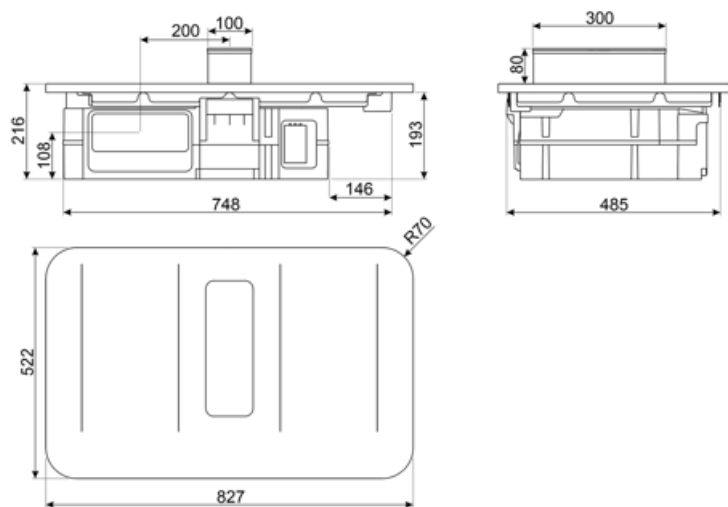

Compatible Accessories



CON60H

Flat duct connector for tubes 220*60 mm. It help to connect more tubes of the kit KITEHOB4



CON90H

Connector for rectangular tubes high 90 mm. Size external 227*94*63 mm, internal 223*90*63 mm



CV45HHSL

Needed for recirculation installations, to be paired with KITRHOB6



FLTRHHSL5

Anti-odour charcoal filter suitable for Alta Pro HHSL7845X/HHSL7845MB models. The anti-odour filter can be washed and regenerated every 3-4 months, up to a Max. of 8 regeneration cycles. Regeneration procedure: Wash in the dishwasher at a MAX temperature of 70°. Dry in the oven at a MAX temperature of 70° for 2 hours. Each kit contains 1 filter.




GRI60H

Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



GRIX6H

Stainless steel ventilation grille, size 426*60 mm.



KITDT50X10

tape for installation kit of HOBD*2. 10 m lenght. 50 mm width.



KITEHOB10

Ducted kit for HOBD*2 with tubes and curve high 10 mm.



KITEHOB4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve, high 60 mm




KITFIT15

horizontal 15° pipe bend, with moulded socket on one side serves as a connecting element to optimally adapt the course of a ventilation system to the structural conditions on site



KITRDEF

90° deflector compatible with rectangular pipes as well as with round pipes of series with a diameter of 150 mm.



KITRHOB6

Mounting kit for recirculating installation: pipes and curves to be mounted in a plinth of minimum 6cm height. Available for HOBD*2 series.



KITREBFLOW

Rectangular grid used in ventilation system, 290 x 160 mm. Backdraft Damper for regulating the air flow from the kitchen. Compatible for HOBD*2 models.

KITRRFIT

Connection kit from round to rectangular, for wall ducting system. Round pipe with a diameter of 150 mm



KITSEBL

Squared grid used in ventilation system with backdraft Damper for regulating the air flow from the kitchen. Compatible for HOBD*2 models.

KRP500

Round tube Ø 150 mm, 50 cm long.

TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

KRP1000

Round tube Ø 150 mm, 1m long.

RED60H



Reducer from 90 to 60 mm suitable for rectangular tube of 220 mm. Size: 220x90x92 mm

Alternative products

HHSL7845X

Colour: Black with stainless steel effect frame



Symbols glossary

	Automatic Boiling function: a sensor confirms once the boiling point has been reached and then an acoustic alert signals that the ingredients can be added, saving time and energy.		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		This function allows you to keep cooked food warm without burner it
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Melting function, suitable for slowly melting delicate foods such as chocolate or butter.
	Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility		All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Simmering function: ideal for long-cooking recipes, preventing food from boiling over or sticking to the pan.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	Permanent auto pot detection		Min diameter pot detection of 9 cm.
	Possibility to set the maximum power absorbion of the hob.		Additional maximum power level for a better energy consumption
	Possibility to freely move the pot everywhere without turn off the initial settings chosen.		