

# KC19AOE

|                      |                      |
|----------------------|----------------------|
| Product family       | Hood                 |
| Hood Type            | Decorative wall hood |
| Design               | Chimney              |
| Extraction           | Extraction           |
| Material             | Heat-moulded         |
| Type of steel        | Brushed              |
| EAN code             | 8017709211745        |
| Hood width           | 90 cm                |
| Aesthetic            | Cortina              |
| Colour               | Anthracite           |
| Components finishing | Antique brass        |
| Logo                 | Applied              |



## Controls

|                 |               |                 |            |
|-----------------|---------------|-----------------|------------|
| Control setting | Control knobs | Control knobs   | Cortina    |
| No. of controls | 2             | Controls colour | Anthracite |

## Program / Functions

|                 |                                                                                     |
|-----------------|-------------------------------------------------------------------------------------|
| No. of speeds   | 3                                                                                   |
| Intensive speed |  |

## Technical Features

|                                                                                    |                                                                                     |                                    |           |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|-----------|
|  |  |                                    |           |
| No. of lights                                                                      | 2                                                                                   | No. of filters                     | 3         |
| Light type                                                                         | LED                                                                                 | Anti-grease filters                | Aluminium |
| Light Power                                                                        | 1 W                                                                                 | Vent outlet                        | 150 mm    |
| Light color temperature scale (K)                                                  | 3000 K                                                                              | Minimum distance from GAS hob      | 750 mm    |
| Free outlet maximum capacity                                                       | 820 m³/h                                                                            | Minimum distance from ELECTRIC hob | 650 mm    |
| Motor power                                                                        | 275 W                                                                               | Non return valve                   | Yes       |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 326                              | 50                               |
| Speed 2 | 439                              | 57                               |

|                 |     |    |
|-----------------|-----|----|
| Speed 3         | 549 | 62 |
| Intensive speed | 794 | 71 |

## Performance / Energy Label




|                                          |            |                                                                                |          |
|------------------------------------------|------------|--------------------------------------------------------------------------------|----------|
| Annual Efficiency Consumption (AEChood)  | 58 kWh/a   | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 50 dBA   |
| Energy efficiency class (EEC)            | A          | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 62 dBA   |
| Fluid Dynamic Efficiency (FDE)           | 31.9       | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 71 dBA   |
| Fluid Dynamic Efficiency class (FDEC)    | A          | Time increase factor (F)                                                       | 0.9      |
| Lighting Efficiency (LE)                 | 83.6 lux/W | Energy Efficiency Index                                                        | 53.1     |
| Lighting Efficiency Class (LEC)          | A          | Measured air flow rate at best efficiency point (Qbep)                         | 430 m³/h |
| Grease Filtering Efficiency (GFE)        | 77.9 %     | Measured air pressure at best efficiency point (Pbep)                          | 457 Pa   |
| Grease Filtering Efficiency Class (GFEC) | C          | Measured electric power input at best efficiency point (Wbep)                  | 171 W    |
| Air flow at minumum speed (Qmin)         | 326 m³/h   | Nominal Power consumption of the light system (WL)                             | 2 W      |
| Air flow at maximum speed (Qmax)         | 549 m³/h   | Average illumination of the light on the cooking surface (Emiddle)             | 184 lux  |
| Air flow at boost speed (Qboost)         | 794 m³/h   | Sound power level at highest setting (Lwa)                                     | 62 dBA   |

## Electrical Connection

|                              |           |                           |             |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 277 W     | Power supply cable length | 1000 mm     |
| Voltage                      | 220-240 V | Plug                      | Not present |
| Frequency (Hz)               | 50-60 Hz  |                           |             |

## Also available

|                               |                                       |                   |                                         |
|-------------------------------|---------------------------------------|-------------------|-----------------------------------------|
| Alternative colours available | White, Cream, Copper, Brass, Red Wine | Available colours | KC19BSE-KC19OTE-KC19POE-KC19RAE-KC19RWE |
|-------------------------------|---------------------------------------|-------------------|-----------------------------------------|

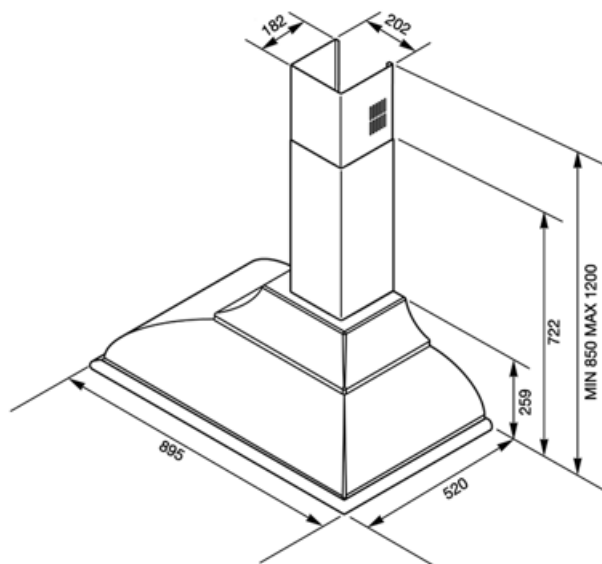

---

## Compatible Accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITKCX-2

KIT LOGO & HANDRAIL CHROME FINISHING



### KITLOGOCR

KIT LOGO CHROME FINISHING



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITLOGOAS

KIT LOGO ANTIQUE SILVER FINISHING

---

## Symbols glossary

---



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.