

# KCH92X

|                    |                      |
|--------------------|----------------------|
| Product family     | Hood                 |
| Hood Type          | Decorative wall hood |
| Design             | Chimney              |
| Extraction         | Extraction           |
| Electronic control | Yes                  |
| Material           | Stainless steel      |
| Type of steel      | Brushed              |
| EAN code           | 8017709310271        |
| Hood width         | 90 cm                |
| Aesthetic          | Universale           |
| Colour             | Stainless steel      |
| Finishing          | Satin                |
| Serigraphy colour  | Black                |
| Logo               | Silk screen          |



## Controls



|                 |                    |         |         |
|-----------------|--------------------|---------|---------|
| Control setting | Electronic buttons | Display | 1 a LED |
| Led color       | White              |         |         |

## Program / Functions

|                 |                                                                                     |
|-----------------|-------------------------------------------------------------------------------------|
| No. of speeds   | 3                                                                                   |
| Intensive speed |  |

## Technical Features



|                                   |          |                                    |           |
|-----------------------------------|----------|------------------------------------|-----------|
| No. of lights                     | 2        | Anti-grease filters                | Aluminium |
| Light type                        | LED      | Filter replacement indicator       | Yes       |
| Light Power                       | 2 W      | Vent outlet                        | 150 mm    |
| Light color temperature scale (K) | 3500 K   | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity      | 650 m³/h | Minimum distance from ELECTRIC hob | 500 mm    |
| Motor power                       | 250 W    | Non return valve                   | Yes       |
| No. of filters                    | 3        |                                    |           |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 245                              | 46                               |

|                 |     |    |
|-----------------|-----|----|
| Speed 2         | 375 | 56 |
| Speed 3         | 500 | 64 |
| Intensive speed | 600 | 68 |

## Accessories included



Charcoal filters included Yes

## Performance / Energy Label



|                                          |            |
|------------------------------------------|------------|
| Annual Efficiency Consumption (AEChood)  | 75 kWh/a   |
| Energy efficiency class (EEC)            | B          |
| Fluid Dynamic Efficiency (FDE)           | 21.1       |
| Fluid Dynamic Efficiency class (FDEC)    | C          |
| Lighting Efficiency (LE)                 | 76.1 lux/W |
| Lighting Efficiency Class (LEC)          | A          |
| Grease Filtering Efficiency (GFE)        | 75.1 %     |
| Grease Filtering Efficiency Class (GFEC) | C          |
| Air flow at minumum speed (Qmin)         | 245 m³/h   |
| Air flow at maximum speed (Qmax)         | 500 m³/h   |
| Air flow at boost speed (Qboost)         | 600 m³/h   |


|                                                                                 |          |
|---------------------------------------------------------------------------------|----------|
| Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) | 46 dBA   |
| Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)   | 64 dBA   |
| Airbourne acouistical A-weighted sound power emission at boost speed (SPEboost) | 68 dBA   |
| Time increase factor (F)                                                        | 1.2      |
| Energy Efficiency Index                                                         | 69.6     |
| Measured air flow rate at best efficiency point (Qbep)                          | 370 m³/h |
| Measured air pressure at best efficiency point (Pbep)                           | 335 Pa   |
| Measured electric power input at best efficiency point (Wbep)                   | 163 W    |
| Nominal Power consumption of the light system (WL)                              | 5 W      |
| Average illumination of the light on the cooking surface (Emiddle)              | 381 lux  |
| Sound power level at highest setting (Lwa)                                      | 64 dBA   |

## Electrical Connection

|                              |       |                           |             |
|------------------------------|-------|---------------------------|-------------|
| Electrical connection rating | 255 W | Power supply cable length | 1500 mm     |
|                              |       | Plug                      | Not present |

Voltage 220-240 V

Frequency (Hz) 50-60 Hz

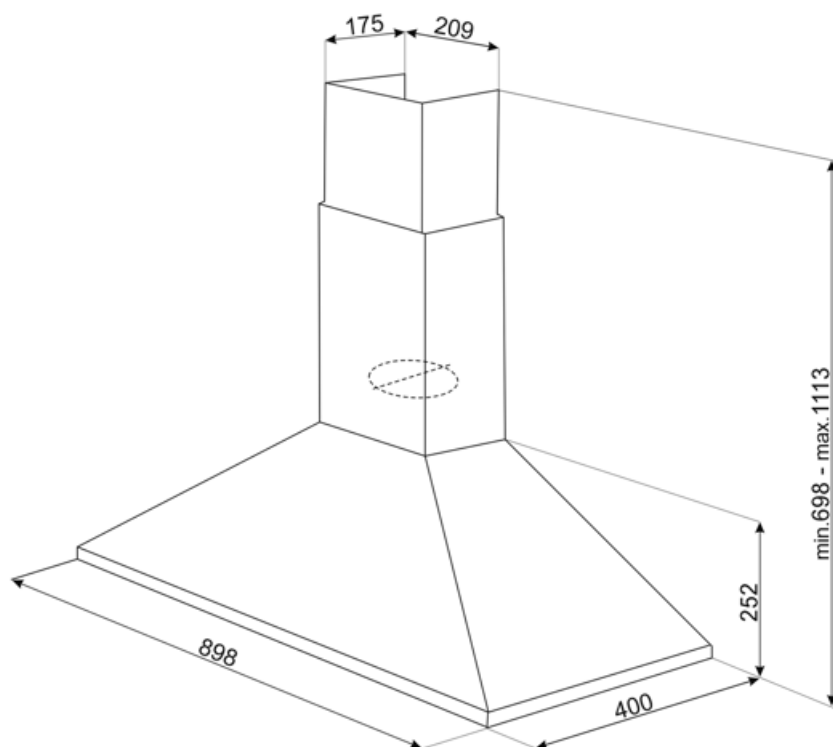

---

## Compatible Accessories

---



**KITFC500**

Round Charcoal filters (kit 2 pieces)

## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.