

# KSEIR92SE2

|                   |                        |
|-------------------|------------------------|
| Product family    | Hood                   |
| Hood Type         | Integrated (semi) hood |
| Design            | Fully integrated       |
| Extraction        | Extraction             |
| Material          | Painted material       |
| EAN code          | 8017709275082          |
| Hood width        | 90 cm                  |
| Aesthetic         | Universale             |
| Colour            | Silver                 |
| Serigraphy colour | Black                  |
| Logo              | Silk screen            |



## Controls

|                 |        |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

## Program / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features

|                                                                                    |                                                                                     |                                    |                   |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|-------------------|
|  |  |                                    |                   |
| No. of lights                                                                      | 2                                                                                   | No. of filters                     | 1                 |
| Light type                                                                         | LED                                                                                 | Anti-grease filters                | Integrated filter |
| Light Power                                                                        | 4 W                                                                                 | Vent outlet                        | 120 mm            |
| Free outlet maximum capacity                                                       | 235 m³/h                                                                            | Minimum distance from GAS hob      | 650 mm            |
| Motor power                                                                        | 115 W                                                                               | Minimum distance from ELECTRIC hob | 500 mm            |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 115                              | 52                               |
| Speed 2 | 160                              | 59                               |
| Speed 3 | 225                              | 68                               |

## Performance / Energy Label



|                                          |          |
|------------------------------------------|----------|
| Annual Efficiency Consumption (AEChood)  | 71 kWh/a |
| Energy efficiency class (EEC)            | D        |
| Fluid Dynamic Efficiency (FDE)           | 8.1      |
| Fluid Dynamic Efficiency class (FDEC)    | E        |
| Lighting Efficiency (LE)                 | 9 lux/W  |
| Lighting Efficiency Class (LEC)          | E        |
| Grease Filtering Efficiency (GFE)        | 40 %     |
| Grease Filtering Efficiency Class (GFEC) | G        |
| Air flow at minumum speed (Qmin)         | 115 m³/h |
| Air flow at maximum speed (Qmax)         | 225 m³/h |


|                                                                                 |          |
|---------------------------------------------------------------------------------|----------|
| Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) | 52 dBA   |
| Airborne acouistical A-weighted sound Power Emission at maximum speed (SPEmax)  | 68 dBA   |
| Time increase factor (F)                                                        | 1.7      |
| Energy Efficiency Index                                                         | 91.6     |
| Measured air flow rate at best efficiency point (Qbep)                          | 125 m³/h |
| Measured air pressure at best efficiency point (Pbep)                           | 244 Pa   |
| Measured electric power input at best efficiency point (Wbep)                   | 105 W    |
| Nominal Power consumption of the light system (WL)                              | 8 W      |
| Average illumination of the light on the cooking surface (Emiddle)              | 70 lux   |
| Sound power level at highest setting (Lwa)                                      | 68 dBA   |

## Electrical Connection

|                              |           |                           |             |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 123 W     | Power supply cable length | 1000 mm     |
| Voltage                      | 220-240 V | Plug                      | Not present |
| Frequency (Hz)               | 50 Hz     |                           |             |

## Also available

|                               |       |                   |            |
|-------------------------------|-------|-------------------|------------|
| Alternative colours available | Black | Available colours | KSEIR92NE2 |
|-------------------------------|-------|-------------------|------------|

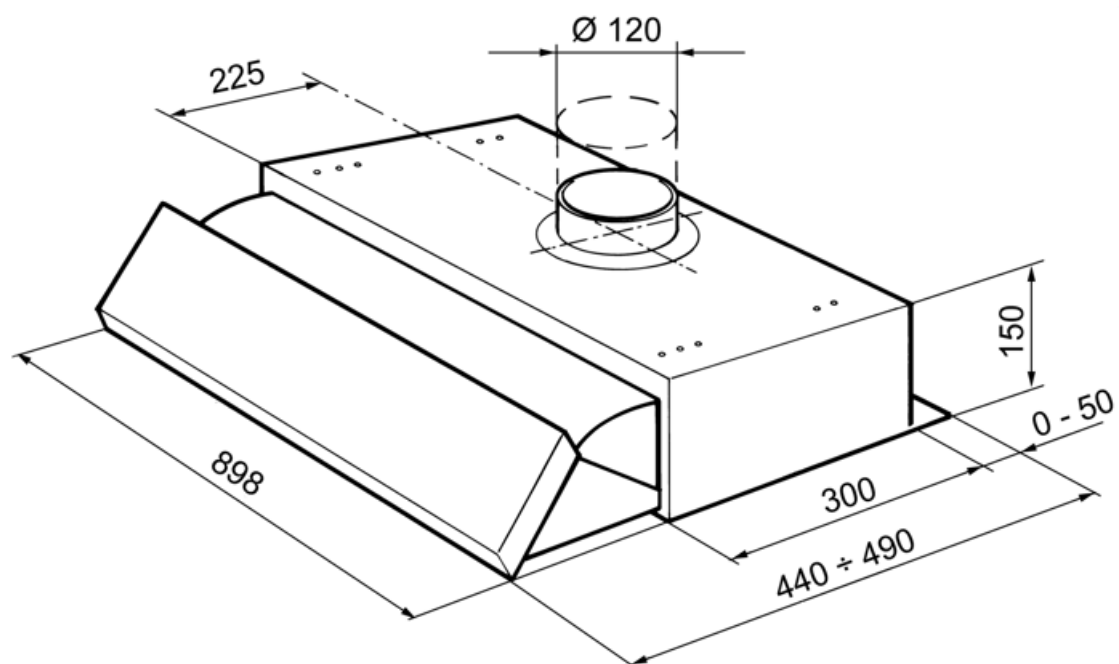

---

## Compatible Accessories

---

**KITFC31**

Charcoal filters round Kit 1 piece



---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

