


KSGT74X

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709328351
Hood width	75 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed

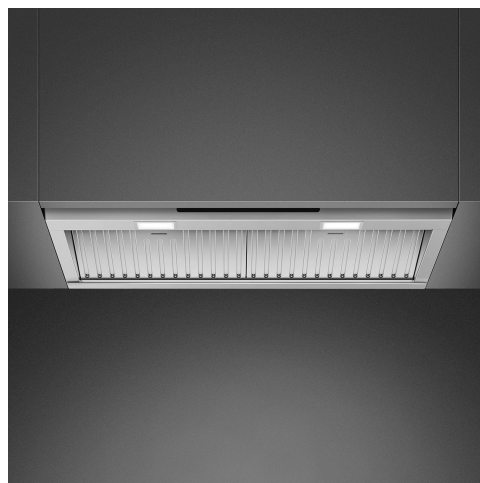

Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	
V-Condense System	

Technical Features



No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	2700 - 4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	500 mm

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	254	48
Speed 2	442	61
Speed 3	603	68
Intensive speed	657	70

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 48 kWh/a
 Energy efficiency class (EEC) A
 Fluid Dynamic Efficiency (FDE) 30.3
 Fluid Dynamic Efficiency class (FDEC) A
 Lighting Efficiency (LE) 42.6 lux/W
 Lighting Efficiency Class (LEC) A
 Grease Filtering Efficiency (GFE) 87.2 %
 Grease Filtering Efficiency Class (GFEC) B
 Air flow at minumum speed (Qmin) 254 m³/h
 Air flow at maximum speed (Qmax) 603 m³/h
 Air flow at boost speed (Qboost) 657 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 48 dBA
 Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 69 dBA
 Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 70 dBA
 Time increase factor (F) 0.9
 Energy Efficiency Index 51.8
 Measured air flow rate at best efficiency point (Qbep) 329 m³/h
 Measured air pressure at best efficiency point (Pbep) 448 Pa
 Measured electric power input at best efficiency point (Wbep) 135 W
 Nominal Power consumption of the light system (WL) 5 W
 Average illumination of the light on the cooking surface (Emiddle) 196 lux
 Sound power level at highest setting (Lwa) 69 dBA

Electrical Connection

Electrical connection rating 280 W Power supply cable length 1500 mm
 Voltage 220-240 V Plug Not present
 Frequency (Hz) 50-60 Hz

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCGT74

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Energy efficiency class A
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Intensive/turbo setting: when extra fast extraction is required.		Connection between hob and hood
	Dimmering Lights		Tunable white from warm to cold.
	V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.		